




FIRE RETARDANT
TREATED TIMBER

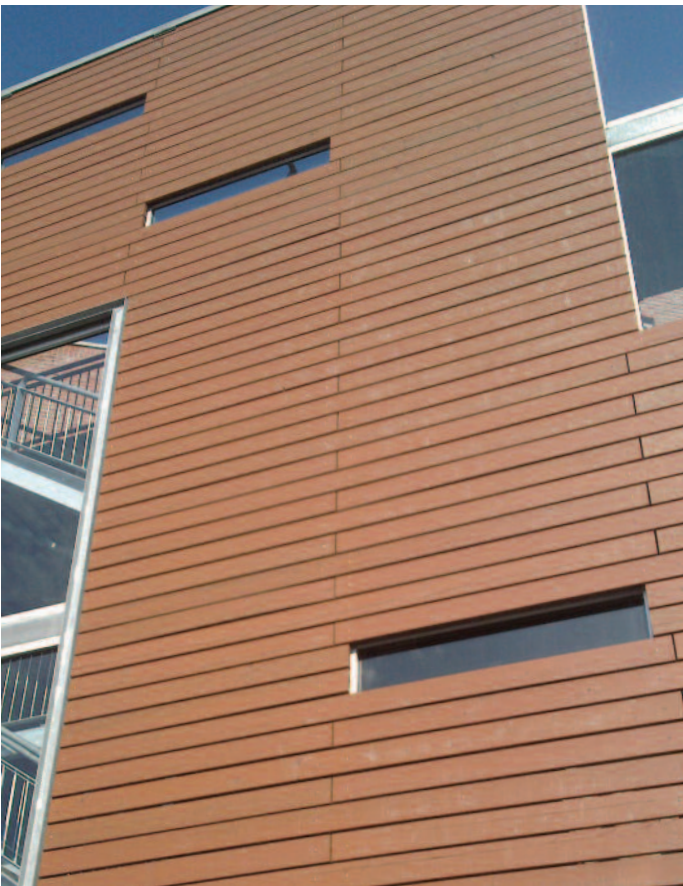

Can you coat it? **YES you can!**

DRYWOOD WOODSTAIN

A high performance and warrantied* waterbased coating system - exclusively for use with NON-COM Exterior fire retardant treated cladding timbers.





Lonza Wood Protection now offers DRYWOOD WOODSTAIN - an exclusive range of water based and warrantied* transparent, semi-opaque and fully opaque coatings for NON-COM Exterior fire retardant treated cladding timbers.

NON-COM Exterior treated cladding, incorporating a tried, tested and proven fire protection, is renowned for its fire performance in external timber applications, without the need for a coating. But what if you require a high performance decorative finish to complete your project?

In collaboration with DRYWOOD Coatings B.V., Lonza Wood Protection now offers DRYWOOD WOODSTAIN for use on NON-COM Exterior treated timber which will deliver either a Euroclass C or B overall fire performance to the coated, fire treated timber as required. This unique combination has proven performance across major projects within mainland Europe.

Whether you want a matt whitewashed look, a traditional wood colour or a contemporary bright finish DRYWOOD WOODSTAIN can match your requirements.



FIRE RETARDANT
TREATED TIMBER




Contact us for further details on the full range of DRYWOOD WOODSTAIN finishes.
01977 714000 or drywood@lonza.com

DRYWOOD WOODSTAIN

- Based on a proven combination of oil-modified waterborne binders, DRYWOOD WOODSTAIN is a low film building, high performance, water based coating system, providing superb protection against UV degradation.
- DRYWOOD WOODSTAIN has a 4 year coating performance warranty* which can be further extended with regular maintenance cycles.
- Available in a range of transparent, semi-opaque and fully opaque finishes or to match RAL specifications.
- DRYWOOD WOODSTAIN must be vacuum applied over NON-COM Exterior treated cladding by an approved applicator. Professional factory application service details are available through Lonza Wood Protection.
- DRYWOOD WOODSTAIN penetrates into the wood with excellent adhesion, building a thin film layer in two or more coats. The thin film layer allows the timber to breathe and prevents excessive dirt retention on the coating surface.
- DRYWOOD WOODSTAIN weathers slowly and evenly over its surface and can be easily overcoated with minimum preparation.
- Euroclass B or C NON-COM Exterior treated timber coated with DRYWOOD WOODSTAIN will still deliver the assured fire protection required.

*For full specification, maintenance, applicator details and warranty details please refer to the separate DRYWOOD WOODSTAIN technical data sheet from Lonza Wood Protection.

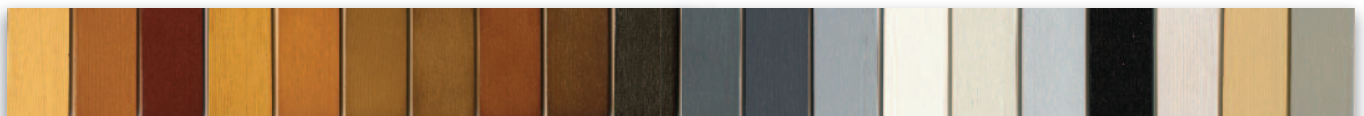

© Copyright 2013 Lonza Wood Protection.

™ NON-COM is a registered trademark of Arch Timber Protection, a Lonza company.

™ DRYWOOD is a registered trademark of Drywood Coatings BV.

Lonza Wood Protection is a business of Arch Timber Protection, a Lonza company.

Disclaimer: Whilst every attempt has been made to ensure the accuracy and reliability of the information contained in this document, Lonza Wood Protection gives no undertaking to that effect and no responsibility can be accepted for reliance on this information.

Lonza Wood Protection updates its literature as and when necessary. Please ensure you have an up to date copy.

Lonza

Lonza Wood Protection

Wheldon Road, Castleford, West Yorkshire, WF 2JT.

Tel: +44 (0)1977 714000 Fax: +44 (0)1977 714001

email: timberprotectionadvice.ukca@lonza.com www.lonzawood.com